




Integrate Evacuation Into Your Refrigeration & AC Analysis

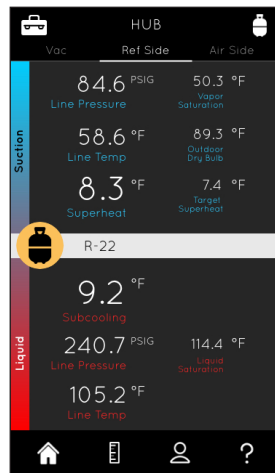

Functions

- Vacuum Range: 20,000 microns
- 700 PSI Maximum Over Range
- Temperature Range: 10 to 122 °F (-12 to 50 °C)

Features

- Male Flare Fitting (Nickel Plated)
- 45° coupler
- Oil Contamination Warning
- Sensor Failure Detection
- Compact light weight design
- Wireless Range 350 ft pending environment
- Magnetic hanger
- Free App
- Dual Mode Vacuum screen
- Evac Target Notification
- Rise Limit Test
- User selectable Units (Microns, Pa, mmHg, mBar)
- Rate of change display
- Water Saturation point
- Works with other HUB probes
- 1-Year limited warranty

Applications

- Measure pressures

Includes

- Batteries (AA) 2
- 45° coupler

Specification

| | |
|------------------------------------|-----------------------------------|
| Vacuum Range | 0 to 20,000 microns |
| Vacuum Resolution | 1 micron |
| Vacuum Accuracy | ±5% rdg ±5 Microns |
| Temperature Range | 10° to 122°F (-12° to 50°C) |
| Temperature Resolution | 0.1°F |
| Temperature Accuracy | ±5°F |
| Maximum Over-Pressure | 700 PSI |
| Operating Temperature Range | 10° to 122°F (-12° to 50°C) |
| Battery Type | 2 (AA) |
| Battery Life | 200 hrs |
| Wireless Range | 350 Ft (depending on environment) |

Downloads



Data Sheet

Manual



0 53533 50861 1
Made in TAIWAN
Designed in USA